


**Grass glass door hinge, for overlay doors**




- > Opening angle 210°
- > For +30° to -30° corner applications
- > For overlay doors
- > Direct fixing, no drilling necessary
- > With catch
- > For glass doors up to 350 mm wide and 800 mm high, maximum door weight 4 kg
- > For 5-6 mm glass thickness
- > Zinc alloy hinge
- > One pair of hinges is suitable for mounting on either the left or the right hand side
- > For safety reasons we recommend that toughened glass be used with these hinges
- > Order fixing screws separately
- > Order qty: 1 pair

30° Negative angle

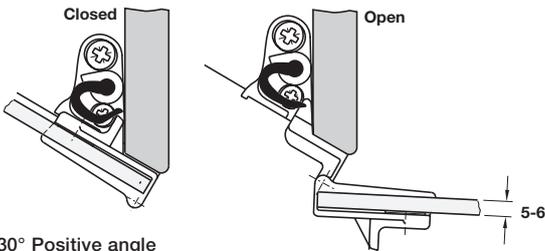


30° Positive angle

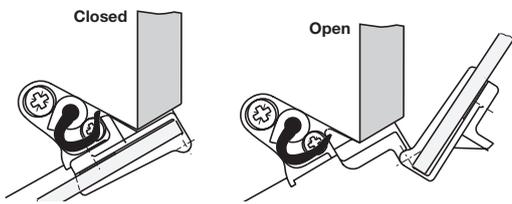


Finish	Cat. No.
Nickel-plated	361.96.701

**Grass glass door hinge, for inset doors**




- > Opening angle 180°
- > For inset doors
- > Direct fixing, no drilling necessary
- > Sprung
- > For glass doors up to 350 mm wide and 800 mm high
- > For 4-6 mm glass thickness
- > Zinc alloy hinge
- > One pair of hinges is suitable for mounting on either the left or the right hand side
- > For safety reasons we recommend that toughened glass be used with these hinges
- > Order fixing screws separately
- > Order qty: 1 pair

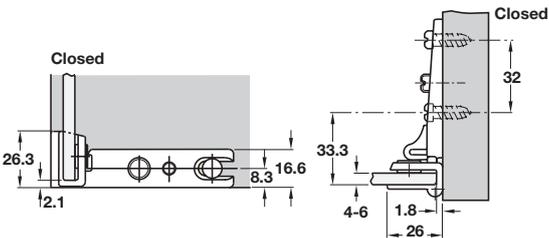

Finish	Cat. No.
Nickel-plated	361.84.701

**Strike plate/stop**



- > For inset doors
- > Steel
- > Order qty: Multiples of 10 pcs

Finish	Cat. No.
Nickel-plated	239.41.013

TOH TECHNOLOGY 2018, © Häfele U.K., Ltd 2018. Dimensional data not binding. We reserve the right to alter specifications without notice.