



SLIDO CLASSIC 40 VF T SLIDING DOOR SYSTEM

Good quality system for pairs of overlaying cabinet doors, ideal for residential and commercial applications including high volume cabinet manufacturers. Easy to assemble and disassemble. High performance soft close fitting included.

- > Slido Classic 40 VF T
- > Can be connected to an electric sliding door drive; e-drive
- > Range: Max. door weight **40 kg**
For door thickness **16-25 mm**
- > Door stopper: Top clip-in door stopper or soft and self closing mechanism, for sliding onto running track
- > Door width: For 2 doors: Min. 520 mm with soft close on both sides. For 3 doors: Min. 350 mm with soft close on one side, min. 820 mm with soft close on both sides
- > Running gear: Top running, 2 rollers
- > Running gear guide by: Ball bearing mounted plastic roller, steel axle
- > Adjustment facility: ± 2 mm on running gear using adjusting wheel
- > Installation: Guide and running gear for screw fixing to door, track for screw fixing to cabinet from outside, double running track also from inside (optional)

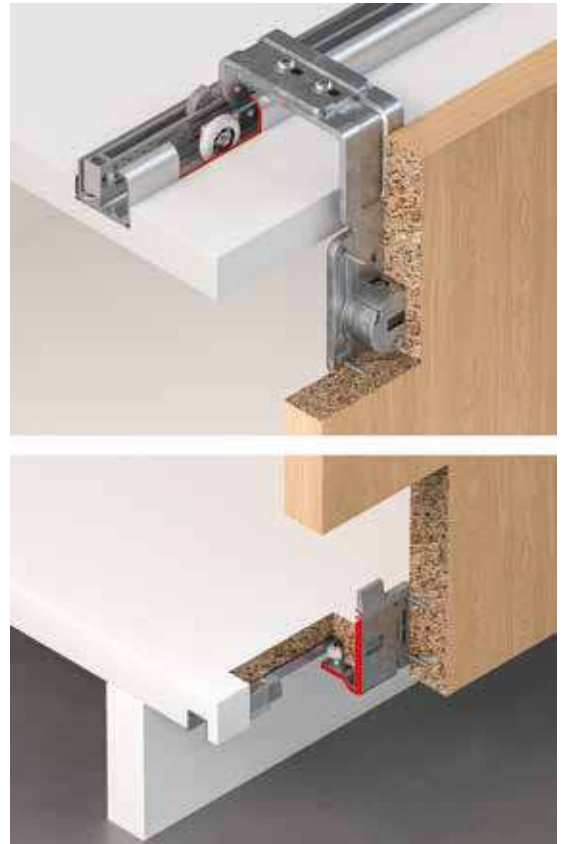


Installation dimensions

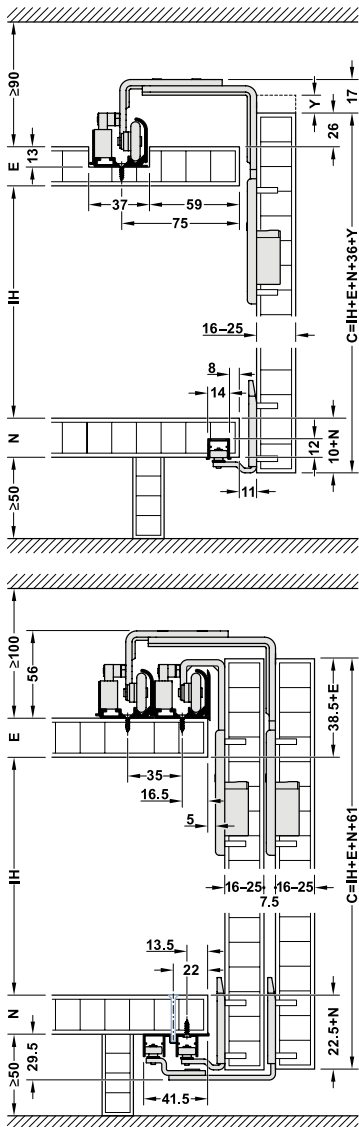

For groove mounting,
 $C = IH + \text{cabinet top panel thickness} + \text{cabinet base panel thickness} + 10 + 26 \text{ mm} + Y$


For screw fixing,
 $C = IH + \text{cabinet top panel thickness} + \text{cabinet base panel thickness} + 22.5 + 38.5 \text{ mm}$

Drilling pattern

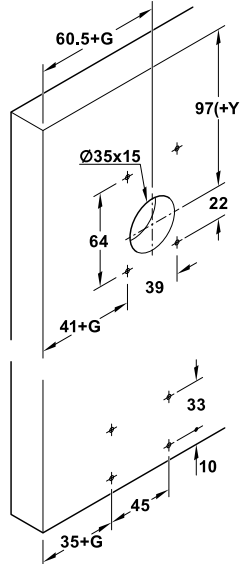

X	1	1 2	1 2 3
0	-	-	-
1	-	-	≥ 350 mm
2	≥ 520 mm	≥ 520 mm	≥ 820 mm

Door overlap

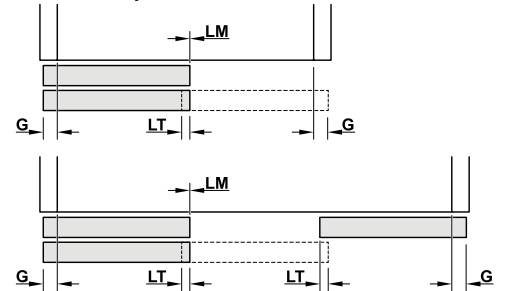


LM = door offset (0 mm)
 LT = door overlap (20 mm recommended)



- > Tracks and fitting sets must be ordered separately, shown on page **71B**
- > Planofit door straightening system must be used to add rigidity to wooden doors, shown on pages **194-195**
- > Electric e-drive set available to order separately, shown on page **71B**

Slido Classic 40 VF T tracks and channels

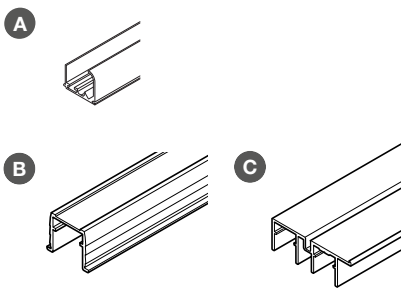


- > Order single or double tracks depending on application
- A Single top running track, pre-drilled, for screw fixing or groove mounting to cabinet top panel. Silver coloured anodised aluminium
- B Single bottom guide track, for min. 19 mm panel thickness, for press fitting and glue fixing into 14 mm groove. Silver coloured anodised aluminium
- B Double bottom guide track, with stop strip, for screw fixing to cabinet bottom panel. Silver coloured anodised aluminium
- > Order qty: 1 pc



Two top tracks must be mounted in parallel in order to make a double running track

Length	2.5 m	3.5 m
A Single top running track	402.31.654	402.31.655
B Single bottom guide track	402.31.632	402.31.633
B Double bottom guide track	402.31.842	402.31.843

Slido Classic 40 VF T fitting sets, for 2 or 3 doors

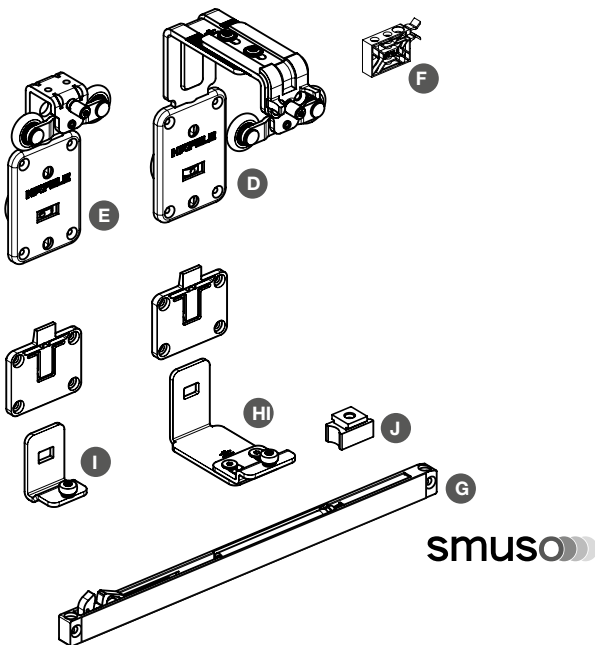

- > Fitting sets include:
- D Running gear for outer door, galvanized steel, with friction bearing, with housing for screw fixing into Ø 35 mm hole, black plastic
- E Running gear for inner door, galvanized steel, with friction bearing, with housing for screw fixing into Ø 35 mm hole, black plastic
- F Top clip-in door stopper, with retainer, black plastic
- G Soft and self closing mechanism, or sliding into top track, grey/black plastic
- H Bottom guide for outer door, screw fixing, galvanized steel and black plastic
- I Bottom guide for inner door, screw fixing, galvanized steel and black plastic
- J Bottom door stopper, for bottom guide track, black plastic
- > Order qty: 1 set



Fitting set	For 2 doors		For 3 doors	
	without	both sides	one side	both sides
Soft close				
D Housing, outer	2 pcs	2 pcs	2 pcs	2 pcs
E Housing, inner	2 pcs	2 pcs	4 pcs	4 pcs
F Clip-in stopper	4 pcs	-	3 pcs	3 pcs
G Soft close	-	4 pcs	3 pcs	6 pcs
H Guide, outer	2 pcs	2 pcs	2 pcs	2 pcs
I Guide, inner	2 pcs	2 pcs	4 pcs	4 pcs
J Bottom stopper	4 pcs	4 pcs	6 pcs	6 pcs
Set 40 VF T	402.31.028	402.31.029	402.31.030	402.31.032

Electric sliding door drive set



- > Electric universal drive for sliding doors, can be retrofitted
- > Extremely quiet opening and closing by tapping the door
- > Bare ended mains cable
- > Order qty: 1 set



Suitable for cabinet width	1600-2400 mm	2400-4000 mm
For 2 doors - Supplied with 1 e-drive, 2 connecting arms		
Cat. No.	405.15.074	405.15.075
For 3 doors - Supplied with 1 e-drive, 3 connecting arms		
Cat. No.	405.15.076	405.15.077