

DOOR STRAIGHTENING FITTING


Aluminium and steel fitting for intallation in a single groove, prevents warping in either direction. For hinged or sliding doors from 13 mm door thick. Suitable for retro fitting; can straighten warped doors. Adjustable from above.

Straightening fitting for wooden doors




- > For hinged and sliding doors, prevents doors warping in either direction or straightens doors which have become warped
- > Adjustment from above
- > Includes 1 straightening fitting
- > Normally two straightening fittings are recommended per door panel
- > Installation: For recess mounting and screw fixing
- > Adjustment facility: On threaded bar with SW 4 hexagon socket
- > Note: Not suitable for hardwood
- > For door heights: 1900-2800 mm
- > For door thickness: Min. 13 mm
- > Material: Aluminium/steel
- > Finish/colour: Silver coloured anodised
- > Order qty: 1 set

Installation

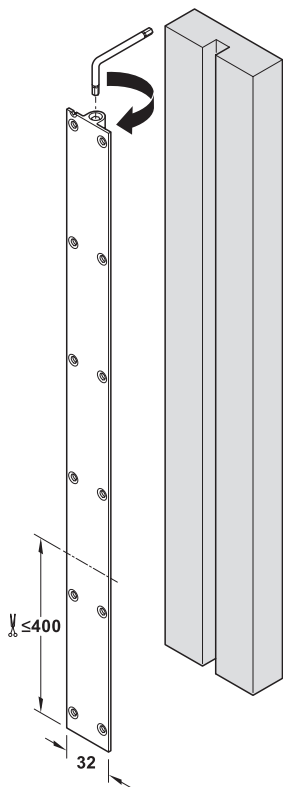

Drilling pattern

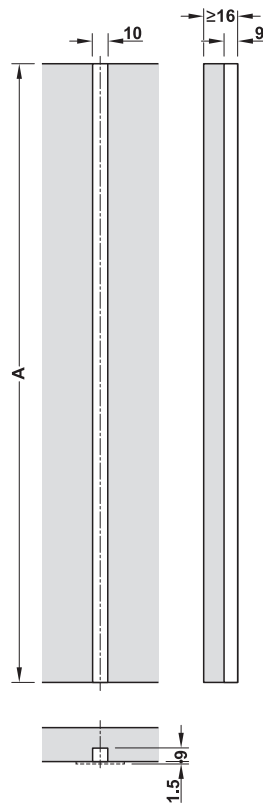

Door height	Dim. A	Cat. No.
1900-2200 mm	Max. 2200 mm	407.91.920
2200-2500 mm	Max. 2500 mm	407.91.921
2500-2800 mm	Max. 2800 mm	407.91.922



- > Not suitable for hardwood
- > Please note when using this product with lacquered panels a pattern of the routed recess may emerge on the front