

LOOX5 12V LED 2062 FLEXIBLE STRIP LIGHT, MONOCHROME, 8 MM

Loox5 lights are high performance offering more output and can also be remote controlled using the Häfele Connect Mesh system. This 5 m LED 2062 strip light has 300 high quality Samsung LEDs per strip and is ideal for ambient lighting. Self adhesive fixing makes these lights easy to retrofit. Can be shortened every 50 mm.



Aluminium profiles are available to order separately, shown from page 5.184


Loox5 12V LED 2062 flexible strip light, 8 mm width



- > Equipped with high quality Samsung LEDs
- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 50 mm
- > Voltage: 12V. Wattage: 24W (4.8W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >50,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m length)

5

Lighting: Loox5 LED

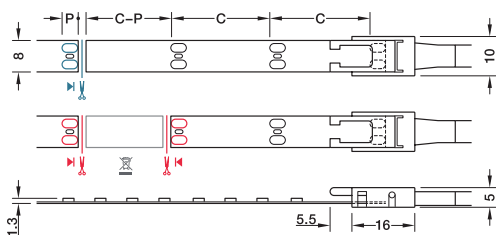

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length = 50 mm
P = length of contact surface = 4.0 mm

Distance	120°			
	2700 K	3000 K	4000 K	5000 K
250 mm	1050 Lx	1090 Lx	1120 Lx	1130 Lx
500 mm	435 Lx	455 Lx	460 Lx	470 Lx
750 mm	240 Lx	245 Lx	260 Lx	260 Lx
1000 mm	145 Lx	150 Lx	155 Lx	160 Lx

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	4.8W per metre			
Energy efficiency:	A+	A+	A+	A+
Number of diodes:	60 per metre			
Light output (Lm/m):	440	465	490	495
Efficacy (Lm/W):	92	97	102	103
CRI Ra / R9:	>90 / >50			



- > Maximum strip length is dependant on driver wattage capacity, shown on page 5.156
- > Maximum recommended strip light length for optimum visual light output: 6.0 m
- > Lead must be ordered separately, shown on page 5.171

5 12V

0-100%

IP20

III

F

7 YEARS

Fixings included

Length	2700 K	3000 K	4000 K	5000 K
5 m	833.74.336	833.74.337	833.74.338	833.74.339

YOU ALSO NEED:

- DRIVER**
Page 5.156
- LEAD**
Page 5.171
- SWITCH**
Page 5.160-166
- OPTIONAL ACCESSORIES**
Pages 5.158-159, 5.167-168, 5.178-181