


# LOOX5 12V LED 2065 FLEXIBLE STRIP LIGHT, MONOCHROME, 8 MM

Loox5 lights are high performance offering more output and can also be controlled using the Häfele Connect Mesh app system. This 5 m LED 2065 strip light has 600 high quality Samsung LEDs per strip and is ideal for ambient lighting. Self adhesive fixing makes these lights easy to retrofit. Can be shortened every 25 mm.



Aluminium profiles are available to order separately, shown from page 5.184

## Loox5 12V LED 2065 flexible strip light, 8 mm width

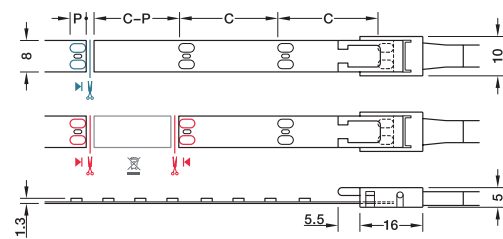

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length = 25 mm  
P = length of contact surface = 4.0 mm

- > Equipped with high quality Samsung LEDs
- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 24W (4.8W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >50,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m length)

TCH DESIGN 2020. © Häfele U.K. Ltd 2017. Dimensional data not binding. We reserve the right to alter specifications without notice.

Distance	120°	2700 K	3000 K	4000 K	5000 K
250 mm		1050 Lx	1090 Lx	1120 Lx	1130 Lx
500 mm		435 Lx	455 Lx	460 Lx	470 Lx
750 mm		240 Lx	245 Lx	260 Lx	260 Lx
1000 mm		145 Lx	150 Lx	155 Lx	160 Lx

The values apply to a strip light length of 1 m

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	4.8W per metre			
Energy efficiency:	A+	A+	A+	A+
Number of diodes:	120 per metre			
Light output (Lm/m):	440	465	490	495
Efficacy (Lm/W):	92	97	102	103
CRI Ra / R9:	>90 / >50			



- > Maximum strip length is dependant on driver wattage capacity, shown on page 5.156
- > Maximum recommended strip light length for optimum visual light output: 6.0 m
- > Lead must be ordered separately, shown on page 5.171

5 12V

0-100%

IP20

III

F

7 YEARS

Fixings included

Length	2700 K	3000 K	4000 K	5000 K
5 m	833.74.354	833.74.355	833.74.356	833.74.357

### YOU ALSO NEED:

- DRIVER**  
Page 5.156
- LEAD**  
Page 5.171
- SWITCH**  
Page 5.160-166
- OPTIONAL ACCESSORIES**  
Pages 5.158-159, 5.167-168, 5.178-181