

# ANGLE BRACKET

TEST METHOD


LOAD CAPACITY  
4-6 kg  
9-13 lbs

NSF


STAINLESS

STAINLESS 304 STEEL

SU

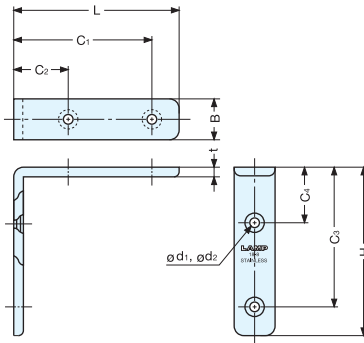

• Stainless steel bracket with soft and sleek design

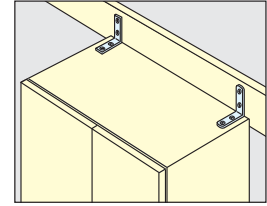

Installation

| Material            | Finish                |
|---------------------|-----------------------|
| 304 Stainless Steel | Mirror (M), Satin (S) |

| Item No. | L       | H               | C <sub>1</sub>  | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | B  | t             | d <sub>1</sub> | d <sub>2</sub> | Holes | Load Capacity (kg) | Weight (g)   | Box (pcs) | Carton (pcs) | Screw |        |
|----------|---------|-----------------|-----------------|----------------|----------------|----------------|----|---------------|----------------|----------------|-------|--------------------|--------------|-----------|--------------|-------|--------|
| SU-30/M  | SU-30/S | 30 ( 1-7/32" )  | 30 ( 1-7/32" )  | 24             | 11             | 24             | 11 | 12 ( 15/32" ) | 2.5            | 3.5            | 6.5   | 4                  | 6 ( 13 lbs ) | 11        | 60           | 960   | 3.1×20 |
| SU-45/M  | SU-45/S | 45 ( 1-13/16" ) | 45 ( 1-13/16" ) | 37             | 17             | 37             | 17 | 13 ( 33/64" ) | 3              |                |       |                    |              |           |              |       |        |
| SU-60/M  | SU-60/S | 60 ( 2-13/32" ) | 60 ( 2-13/32" ) | 50             | 20             | 50             | 20 | 15 ( 19/32" ) |                | 4              | 7.5   |                    | 4 ( 9 lbs )  | 36        | 40           | 640   |        |

# ANGLE BRACKET


TEST METHOD

LOAD CAPACITY  
12-23 kg

5X30 STAINLESS

STAINLESS 304 STEEL

XL-SA01

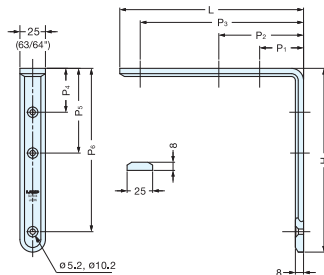

• Stainless steel bracket with soft and sleek design

| Material            | Finish               |
|---------------------|----------------------|
| 304 Stainless Steel | Satin(S), Mirror (M) |

| Item No.      |               | L              | H              | P <sub>1</sub> | P <sub>2</sub> | P <sub>3</sub> | P <sub>4</sub> | P <sub>5</sub> | P <sub>6</sub> | Holes | Load Capacity (kg) | Weight (g) | Box (pcs) | Carton (pcs) |
|---------------|---------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-------|--------------------|------------|-----------|--------------|
| Satin         | Mirror        |                |                |                |                |                |                |                |                |       |                    |            |           |              |
| XL-SA01-120/S | XL-SA01-120/M | 120 (4-23/62") | 120 (4-23/62") | 38             | -              | 100            | 38             | -              | 100            | 4     | 23/pc              | 312        | 8         | 40           |
| XL-SA01-150/S | XL-SA01-150/M | 150 (5-29/32") | 150 (5-29/32") | 43             | -              | 130            | 43             | -              | 130            | 6     | 18 /pc             | 400        | 6         | 30           |
| XL-SA01-180/S | XL-SA01-180/M | 180 (7-5/64")  | 180 (7-5/64")  |                | 83             | 160            |                | 83             | 160            |       | 14 /pc             | 483        |           |              |
| XL-SA01-240/S | XL-SA01-240/M | 240 (9-29/64") | 240 (9-29/64") | 220            | 220            | 220            | 220            | 12 /pc         | 660            |       | 4                  | 20         |           |              |

# ANGLE BRACKET

TEST METHOD



LOAD CAPACITY  
10-24 kg  
22-52 lbs

NSF

M4x25 STAINLESS

STAINLESS 304 STEEL

SU-A

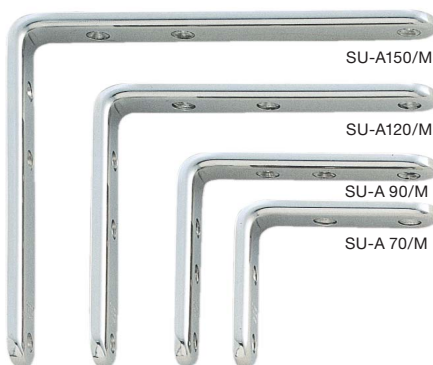

• Stainless steel angle bracket for application where corrosion is an issue.

| Material            | Finish |
|---------------------|--------|
| 304 Stainless Steel | Mirror |

| Item No.   | L                | H                | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> | d <sub>1</sub> | d <sub>2</sub> | Holes | Load Capacity (kg) | Weight (g) | Box (pcs) | Carton (pcs) |
|------------|------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-------|--------------------|------------|-----------|--------------|
| SU-A 70/M  | 70 ( 2-3/4" )    | 70 ( 2-3/4" )    | -              | 60             | 30             | -              | 60             | 30             | 4.2            | 8.2            | 4     | 24 ( 52 lbs )      | 107        | 10        | 100          |
| SU-A 90/M  | 90 ( 3-35/64" )  | 90 ( 3-35/64" )  | 80             | 50             |                | 80             | 50             |                |                |                |       |                    |            |           |              |
| SU-A 120/M | 120 ( 4-23/32" ) | 120 ( 4-23/32" ) | 110            | 60             | 60             | 110            | 60             | 6              | 4.2            | 8.2            | 6     | 13 ( 28 lbs )      | 194        | 8         | 80           |
| SU-A 150/M | 150 ( 5-29/32" ) | 150 ( 5-29/32" ) | 140            |                |                | 140            | 140            |                |                |                |       | 10 ( 22 lbs )      | 248        |           |              |