

BAR LATCH




BL



BL-55




BL-35

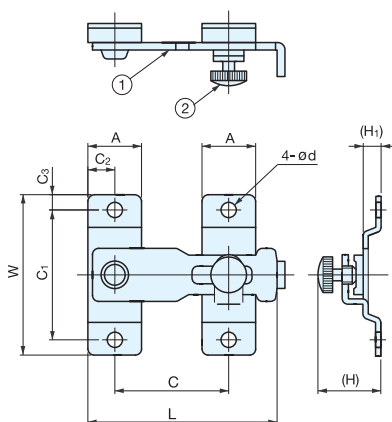

BL-45 ~ 120

- Latch with thumb screw on female strike to keep latch closed.
- No thumb screw on BL-35.



BL-35

No.	Part Name	Material	Finish
①	Body, Strike	304 Stainless Steel	Polished
②	Thumb Screw	Brass	Chrome

Item No.	L	W	A	C	C ₁	C ₂	C ₃	H	H ₁	d	Weight(g)	Box (pcs)	Carton (pcs)
BL- 35	35 (1-3/8")	35 (1-3/8")	10	22	28	5	3.5	-	4.2	3.3	19	30	1200
BL- 45	45 (1-49/64")	40 (1-37/64")	13	28	32	6.5	4	15 (19/32")	4.5	3.3	28	20	900
BL- 55	55 (2-11/64")	46 (1-13/16")	16	35	37	8	4.5	19 (3/4")	6	4	50	10	720
BL- 80	81 (3-3/16")	65 (2-9/16")	20	52	53	10	6	23 (29/32")	7	4.8	100	5	360
BL-100	100 (3-15/16")	80 (3-5/32")	25	60	66	12.5	7	29 (1-6/64")	8	5.5	200	5	150
BL-120	120 (4-23/32")	100 (3-15/16")	30	75	80	15	10	30 (1-3/16")	8	6.5	295	5	100

SPRING LOADED BAR LATCH



BLL




BLL-100




BLL-45

PAT

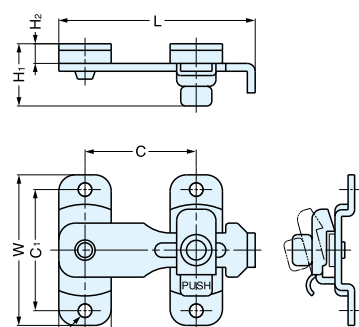


BLL-45~100



BLL-120, 150

- Latch bolt snaps into the strike to prevent accidental release.
- Push tab on strike to release.

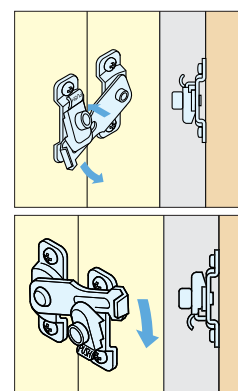

Installation

Material	Finish
304 Stainless Steel	Polished

Item No.	L	W	A	C ₁	C ₂	C ₃	H ₁	H ₂	C	d	Weight (g)	Box (pcs)	Carton (pcs)	Screw
BLL- 45	48 (1-57/64")	40 (1-37/64")	13	32	6.5	-	17	4.5	23± 3 (29/32" ± 1/8")	3.2	28	20	400	3 ×10
BLL- 60	63 (2-31/64")	46 (1-13/16")	16	37	8	-	20	6	34± 4 (1-11/32" ± 5/32")	4.2	50	10	200	3.5 ×16
BLL- 80	85 (3-11/32")	65 (2-9/16")	20	53	10	-	22.5	7	47± 7 (1-27/32" ± 9/32")	5	100	5	100	4.5 ×16
BLL-100	105 (4-1/8")	80 (3-5/32")	25	66	12.5	-	26.5	8	59± 7 (2-21/64" ± 9/32")	5.5	182	8	80	5 ×20
BLL-120	127 (5")	100 (3-15/16")	28.5	80	6.75	15	28	8	56± 10 (2-13/64" ±25/64")	6.2	270	6	60	
BLL-150	155 (6-3/32")	120 (4-23/32")	30.5	95	7.25	16			74± 14 (2-29/32" ±35/64")		350			