


Superior Danish oil

- Blend of pure Tung Oil and natural oils
- Feeds, protects and enhances the natural colour of wood
- Added UV filter for protection against sunlight
- Water, heat and alcohol resistant
- Quick drying formula
- Suitable for interior and exterior use
- EN71 Approved – Safe for toys

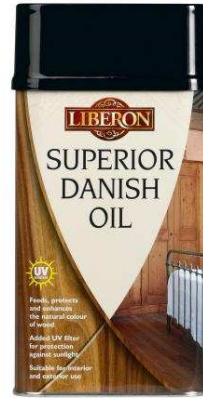

USAGE

Interior and exterior

COVERAGE

1L
10-12 m²

APPLICATION

Brush or cloth

DRYING TIME

Min 5 hours

TOOL CLEANING

White Spirit



Safe for toys

Liberon Superior Danish Oil is a blend of pure tung oil and natural oils which protect hard and soft woods. It is a penetrating oil, which brings out the natural grain of the timber and provides a satin to gloss sheen. With added UV filters to help prevent discolouration from the sun it is suitable for interior and exterior use.

Preparation

Interior woodwork

Ensure the surface is bare: remove any wax finishes with Liberon Wax and Polish Remover and any varnish finishes with Liberon Fine Wood Stripper. Clean, dry and ensure the surface is dust free. If required stain the wood with Liberon Palette Wood Dye before oiling.

Exterior woodwork

Ensure the surface is clean, dry and free from decaying timber. Surface greying or mould should also be removed as this may cause blackening of the timber.

Application

Interior woodwork

Apply with a brush or lint-free cotton cloth and allow to penetrate for 5 to 10 minutes before wiping off the excess with a clean lint-free cloth. Allow to dry for a minimum of 5 hours and apply more coats as required. We recommend a minimum of 3 coats. For best results gently rub with Liberon Ultra Fine Steel Wool (0000) between coats. In damp areas such as kitchens and bathrooms more coats will be required.

Exterior woodwork

Apply as above. Application of 4 coats will give minimum protection. Exposed areas will require more coats. It is important to ensure sufficient coats of oil are applied initially to give maximum protection. It is not necessary to remove the excess on sawn timber, but do wipe off any runs.

Important: Oil finishes bring out the natural colours of timber. A wet surface will be an indication of the final colour. Always test product on spare surface of inconspicuous area for colour, compatibility and end result.

Cleaning and maintenance

Interior woodwork

Surfaces may be cleaned using a damp cloth and spills should be wiped up immediately. For stubborn stains a mild detergent can be used. Surfaces need to be re-oiled once a year or more, depending upon usage.

Exterior woodwork

Clean off any surface grime, moulds etc. (sand if required) before re-oiling. Exterior timbers need to be maintained on a regular basis, at least twice a year.

Precautions

- Superior Danish Oil may darken some timbers and blackening may occur on some external timbers.
- Store Liberon Superior Danish Oil at a temperature above 5 °C. Always replace the lid otherwise the oil can deteriorate.
- Oily cloths can self combust. Do not leave impregnated cloths in bundles. Before discarding lay them flat outside to dry to avoid a fire hazard.
- Superior Danish Oil is not suitable for use on external oak. Liberon Pure Tung Oil is recommended for this purpose.

- If the excess is not removed and the surface becomes sticky, wipe with white spirit to remove the sticky film and allow to dry before continuing.

Packaging

Superior Danish Oil is available in 250ml, 500ml, 1L, 2.5 L and 5L containers.

Health and Safety

Flammable. Repeated exposure may cause skin dryness or cracking. Keep out of the reach of children. Do not empty into drains. Use only in well-ventilated areas. If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label.

Contains hydroxyphenyl benzotriazole, cobalt carboxylate. May cause an allergic reaction.

EU limit value for Superior Danish Oil (cat. A/f): 700g/l (2007) / 700g/l (2010).

Superior Danish oil contains max 584g/l VOC

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555

Liberon Limited, Mountfield Industrial Estate, New Romney, Kent TN28 8XU.

Tel: 01797 367555 Fax: 01797 367575 www.liberon.co.uk Liberon Ltd is a V33 Group Company.