


LID STAY



HS




Installation

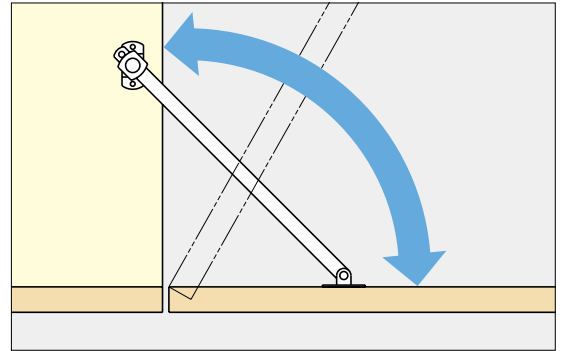

LID SUPPORTS

LID STAY

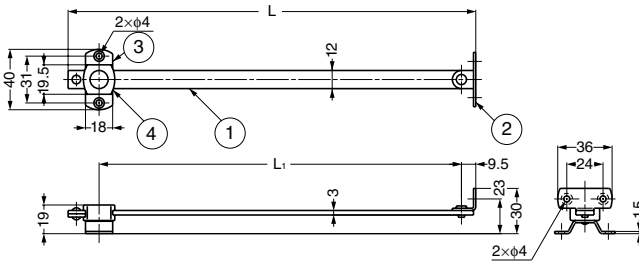

No.	Part Name	Material	Finish/Colour
①	Arm	Stainless Steel (SUS304)	Satin
②	Bracket	Stainless Steel (SUS304)	Satin
③	Mounting Plate	Stainless Steel (SUS304)	Satin
④	Bracket	Polyamide (PA)	White

Item Code	Item Name	L	L ₁	Weight	Box	Carton
180-100-020	HS-180	210	180	80 g	20 pcs	220 pcs
180-100-021	HS-210	240	210	90 g	20 pcs	220 pcs
180-100-022	HS-240	270	240	100 g	20 pcs	220 pcs

LID STAY

KLS





Features

- With stopper.
- Lift up the door to release the stopper.

Remarks

- Right side installation only.
- Max. door height is 300 mm.

Installation (With Single Knuckle Hinge)

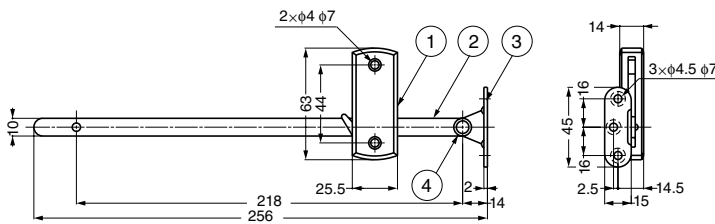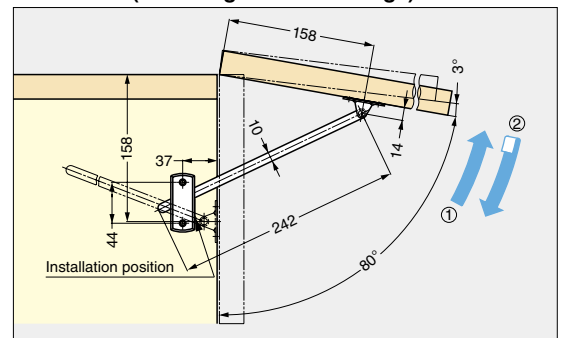

No.	Part Name	Material	Finish/Colour
①	Body	Polyamide (PA)	White
②	Arm	Steel	Nickel
③	Bracket	Steel	Nickel
④	Spring	Steel	-

Item Code	Item Name	Door Weight	Weight	Box	Carton
180-100-052	KLS	Max. 8 kg	85 g	20 pcs	200 pcs