

HÄFELE CONNECT MESH APP AND DISTRIBUTOR



Control several light colours on one box. Each output port can be controlled individually. For on/off switching and dimming of monochromatic lights; or, in conjunction with adapters, operate multi-white lights, RGB lights, and electrically operated fittings.



- > Häfele Connect Mesh App:
 - Detects and reports new nodes in the network independently
 - Intuitively assign functions to switches
 - Set up light groups and scenes
 - Share your protected access with others
- > The Häfele Connect Mesh App is free for Apple iOS® and Android™

5


Lighting: Loox5 LED


-  Please order adapter for multi-white lights, RGB lights or electrically operated fittings separately, see page **5.179**
-  6-way distributor for monochromatic lights or other 2-pin consumers, such as electrically operated fittings, see page **5.158**

Häfele Connect Mesh 6-way distributor, with switching function



- > For on/off switching and dimming (0-100%) of monochromatic lights; or, in conjunction with adapters, for the operation of multi-white lights, RGB lights, and electrically operated fittings.
- > With programmable switch input for standard Loox switches (switching function programmable via app; each active component can control each passive component.
Dim. (L X W X H): 51 x 121 x 16 mm
- > Number of connections:
 - 1x input port with box to box plug
 - 1x output port with box to box socket
 - 1x input port switch socket
 - 6x output ports consumer sockets (2-core), can be controlled from any active component of the network
- > Supplied with: 1x distributor
- > Black plastic
- > Order qty: 1 pc

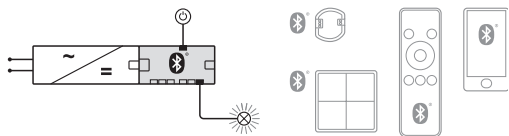

 The distance between the smartphone or tablet to the nearest Häfele Connect Mesh component is approx. 10 m. Multiple components create a network, and can be placed approx 10 m apart.

5 12V **5 24V**



Voltage	Max. connected wattage	Cat. No.
12V	60W	850.00.042
24V	90W	850.00.043

TOH DESIGN 2020. © Häfele U.K. Ltd 2020. Dimensional data not binding. We reserve the right to alter specifications without notice.