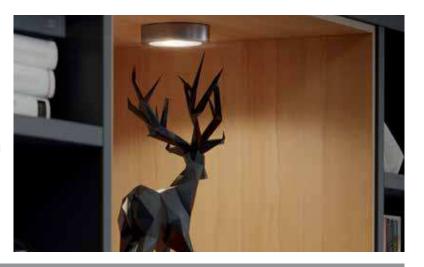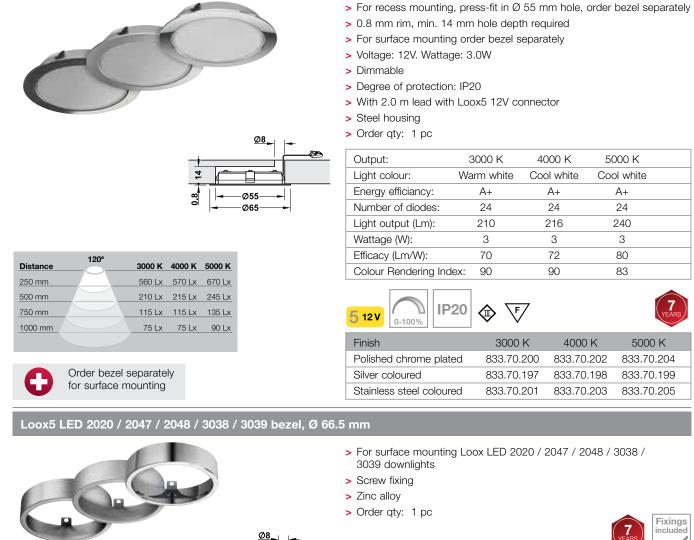# LOOX5 12V LED 2047 DOWNLIGHT

The powerful LED 2047 with frosted real glass cover makes a wide range of applications possible in furniture. The housing components are exclusively made from steel, providing good service as ambient lighting for years. The different mounting variants and optional housing provide a great deal of flexibility during installation.

Loox5 512V LED 2047 downlight, Ø 65 mm

> For recess mounting, press-fit in Ø 55 mm hole, order bezel separately
> 0.8 mm rim, min. 14 mm hole depth required
> For surface mounting order bezel separately
> Voltage: 12V. Wattage: 3.0W
> Dimmable
> Degree of protection: IP20
> With 2.0 m lead with Loox5 12V connector
> Steel housing
> Order qty: 1 pc

Ø8
14
0.8
Ø55
Ø65

Output:	3000 K	4000 K	5000 K
Light colour:	Warm white	Cool white	Cool white
Energy efficiancy:	A+	A+	A+
Number of diodes:	24	24	24
Light output (Lm):	210	216	240
Wattage (W):	3	3	3
Efficacy (Lm/W):	70	72	80
Colour Rendering Index:	90	90	83

Distance	120°	3000 K	4000 K	5000 K
250 mm		560 Lx	570 Lx	670 Lx
500 mm		210 Lx	215 Lx	245 Lx
750 mm		115 Lx	115 Lx	135 Lx
1000 mm		75 Lx	75 Lx	90 Lx

5 12V | 0-100% | IP20 | F | 7 YEARS

Order bezel separately for surface mounting

Finish	3000 K	4000 K	5000 K
Polished chrome plated	833.70.200	833.70.202	833.70.204
Silver coloured	833.70.197	833.70.198	833.70.199
Stainless steel coloured	833.70.201	833.70.203	833.70.205

Loox5 LED 2020 / 2047 / 2048 / 3038 / 3039 bezel, Ø 66.5 mm

> For surface mounting Loox LED 2020 / 2047 / 2048 / 3038 / 3039 downlights
> Screw fixing
> Zinc alloy
> Order qty: 1 pc

Ø8
15.5
0.8
Ø66.5

7 YEARS | Fixings included ✓

Finish	Cat. No.
Polished chrome plated	833.72.802
Silver coloured	833.72.803
Stainless steel coloured	833.72.804

YOU ALSO NEED:

✓ **DRIVER** Page 5.156

✓ **SWITCH** Page 5.160-166

OPTIONAL ACCESSORIES Pages 5.158-159, 5.167-168, 5.178-181