


LOOX5 12V LED 2080 FLEXIBLE STRIP LIGHT RGB, 10 MM

Create a relaxing or invigorating atmosphere with this RGB colour changing strip light by selecting individual light colours. Order the Häfele Connect Mesh system and RGB adapter to control the LED 2080 strip light, using either the remote control or your own smartphone. 5 m strip light length with 600 LEDs and a wattage output of 9.6W per meter.



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

Loox5 12V LED 2080 flexible strip light, RGB 10 mm

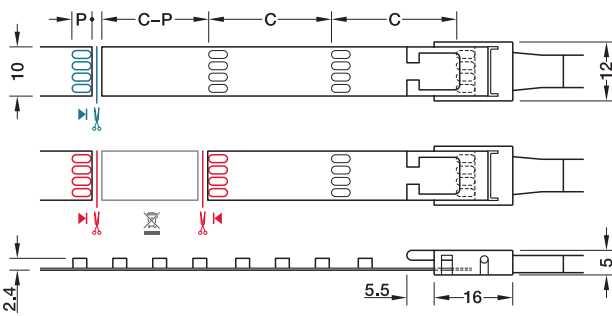

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 25 mm
P = length of contact surface: 3.8 mm

- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 48W (9.6W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with RGB adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Width: 10 mm
- > Height: 2.4 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m length)



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 3.0 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with RGB adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.174**

Light colour:	RGB
Wattage (W):	9.6W per meter
Energy efficiency:	A+
Number of diodes:	120 per meter
Light output (Lm/m):	530
Efficacy (Lm/W):	51

5 12V

RGB Colour

0-100%

IP20

III

F

7 YEARS

Fixings included

Length	RGB
5 m	833.74.380

YOU ALSO NEED:

DRIVER
Page 5.156

LEAD
Page 5.174

CONTROL
Page 5.178-180

OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181