


# LOOX5 24V LED 3080 FLEXIBLE STRIP LIGHT RGB, 10 MM

Create a relaxing or invigorating atmosphere with this RGB colour changing strip light by selecting individual light colours. Order the Häfele Connect Mesh system and RGB adapter to control the LED 3080 strip light, using either the remote control or your own smartphone. 5 m strip light length with 600 LEDs and a wattage output of 9.6W per meter.



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

## Loox5 24V LED 3080 flexible strip light, RGB 10 mm

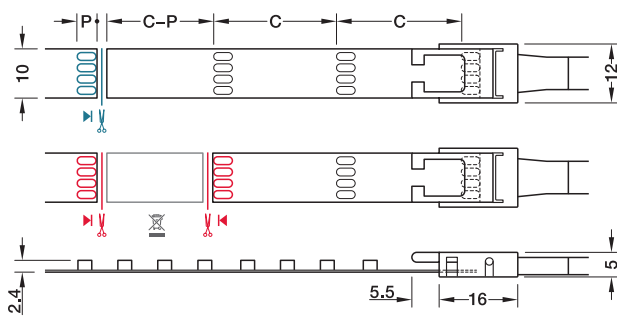

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 50 mm  
P = length of contact surface: 3.8 mm

- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 50 mm
- > Voltage: 24V. Wattage: 48W (9.6W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with RGB adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Width: 10 mm
- > Height: 2.4 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m length)

Light colour:	RGB
Wattage (W):	9.6W per meter
Energy efficiency:	A+
Number of diodes:	120 per meter
Light output (Lm/m):	530
Efficacy (Lm/W):	51



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.157**
- > Maximum recommended strip light length for optimum visual light output: 6.5 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with RGB adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.174**

5 24V

RGB Colour

0-100%

IP20

III

F

7 YEARS

Fixings included

Length	RGB
5 m	833.76.386

### YOU ALSO NEED:

- DRIVER**  
Page 5.157
- LEAD**  
Page 5.174
- SWITCH**  
Page 5.160-166
- CONTROL**  
Page 5.178-180
- OPTIONAL ACCESSORIES**  
Pages 5.159, 5.167-168