


# Teak oil

- A blend of pure tung oil and linseed oil
- Nourishes and enhances the natural beauty of hard exotic/oily wood
- Added UV filter minimises fading from sunlight
- Finishes and protects interior and exterior woodwork
- Ideal for use on garden furniture
- EN71 Part 3 Approved – safe for toys

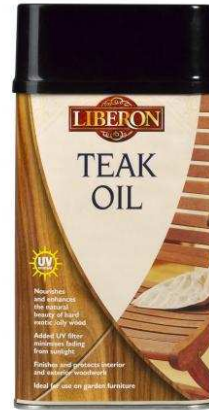

## USAGE

Interior and exterior

## COVERAGE

1L  
10-12 m<sup>2</sup>

## APPLICATION

Brush or cloth

## DRYING TIME

24 hours

## TOOL CLEANING

White Spirit



Safe for toys

Liberon Teak Oil is a blend of pure tung oil and linseed oil which nourishes and enhances the natural beauty of hard/exotic woods, including teak and iroko. With added UV filters for protection against fading from sunlight Teak Oil is suitable for interior and exterior use.

Achieving the traditional cabinet maker's finish on hard wood, Teak Oil produce a hard wearing satin finish.

## Preparation

Ensure the wood surface is bare: remove any wax finishes with Liberon Wax and Polish Remover and any varnish finishes with Liberon Fine Wood Stripper. Clean, dry and ensure the surface is dust free.

## Application

Apply Liberon Teak Oil either by brush or using a lint-free cotton cloth. Leave the oil to penetrate for up to 15 minutes, then wipe off the excess with a clean lint-free cloth. Failure to do so will prevent penetration of future coats and leave a sticky surface.

Apply additional coats as above, the number of coats required will depend on how dry or damaged the wood is. Always leave a 24 hour interval between coats and allow the last coat to fully harden before use. We recommend a minimum of 3 coats on internal and external timbers. For best results, gently rub with Liberon Ultra Fine Steel Wool (0000) or extra fine abrasive paper between coats. Use the abrasive paper when working on outdoor furniture.

**Important:** Oil finishes bring out the natural colours of timber. A wet surface will be an indication of the final colour. Always test product on a spare surface or inconspicuous area for colour, compatibility and end result.

## Cleaning and maintenance

Surfaces may be cleaned using a damp cloth and spills should be wiped up immediately. For stubborn stains a mild detergent can be used. Surfaces need to be re-oiled once a year or more, depending upon usage. Oiled external timber will need regular maintenance. Apply Teak Oil once or twice a year (or as necessary) to maintain protection.

## Precautions

- Store Liberon Teak Oil at a temperature above 5 °C. Always replace the lid otherwise the oil can deteriorate.
- Oily cloths can self combust. Do not leave impregnated cloths in bundles. Before discarding lay them flat outside to dry to avoid a fire hazard.
- Teak Oil is not suitable for use on external oak. Liberon Pure Tung Oil is recommended for this purpose.
- If the excess is not removed and the surface becomes sticky, wipe with white spirit to remove the sticky film and allow to dry before continuing.

## Packaging

Teak Oil is available in 250ml, 500ml, 1L and 5L containers.

## Health and Safety

Flammable. Repeated exposure may cause skin dryness or cracking. Keep out of the reach of children. Do not empty into drains. Use only in well-ventilated areas. If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label.

Contains cobalt compound and methylehtylketoxime. May produce an allergic reaction.  
EU limit value for Teak Oil (cat. A/f): 700g/l (2007) / 700g/l (2010).  
Teak oil contains max 246g/l VOC

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555

Liberon Limited, Mountfield Industrial Estate, New Romney, Kent TN28 8XU.  
Tel: 01797 367555 Fax: 01797 367575 [www.liberon.co.uk](http://www.liberon.co.uk) Liberon Ltd is a V33 Group Company.